



# Complete Range of Water Pumps Powered by Honda Engine

- Highly effective mechanical seal made with special carbon ceramics provides extra durability.
- Entire unit is protected by sturdy rollover pipe frame.
- Strong and lightweight die-cast aluminum pump.

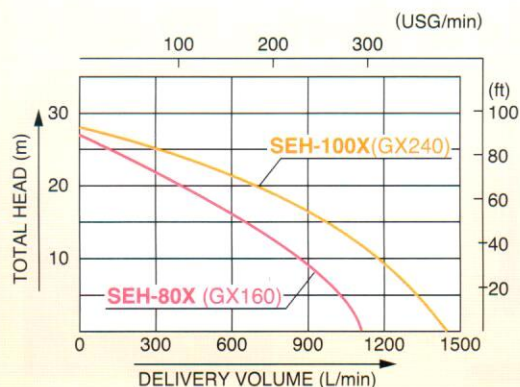

## Performance Curve

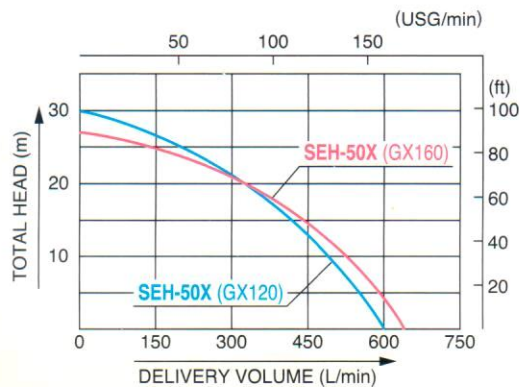

SEH-50X



SEH-80X

## Specifications

	Model	SEH-50X	SEH-80X	SEH-100X	
PUMP	Connection Dia	50 mm (2")	80 mm (3")	100 mm (4")	
	Connection Thread	Outer Pipe Thread BSP			
	Total Head	30 m (98 ft)	27 m (88 ft)	27 m (88 ft)	28 m (92 ft)
	Delivery Volume	600 L/min (158 USG/min)	640 L/min (169 USG/min)	1100 L/min (290 USG/min)	1450 L/min (383 USG/min)
	Max. Suction Head	8 m (26 ft)			
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine			
	Model	Honda GX120	Honda GX160	Honda GX160	Honda GX240
	Exhaust Volume	118 cc	163 cc	163 cc	270 cc
	Rated Output	2.1 kW (2.9 PS) / 3600 rpm	2.9 kW (3.9 PS) / 3600 rpm	2.9 kW (3.9 PS) / 3600 rpm	4.6 kW (6.2 PS) / 3600 rpm
	Max. Output	2.6 kW (3.5 PS) / 3600 rpm	3.6 kW (4.9 PS) / 4000 rpm	3.6 kW (4.9 PS) / 3600 rpm	5.9 kW (9.8 PS) / 3600 rpm
	Fuel	Automotive Unleaded Gasoline			
	Fuel Tank Capacity	2.0 L (0.53 USG)	3.1 L (0.8 USG)	3.1 L (0.82 USG)	5.3 L (1.4 USG)
	Continuous Operating Time	Approx. 2 hrs	Approx. 2 hrs	Approx. 2 hrs	Approx. 2.5 hrs
	Starting Method	Recoil Starter			
	Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set			
Gross Weight	22 kg (48.5 lbs)	27 kg (59.5 lbs)	30 kg (66.1 lbs)	59 kg (130 lbs)	
Dimensions LxWxH (mm)	483 x 375 x 376	527 x 429 x 535	525 x 389 x 458	670 x 477 x 669	
Packing Unit	1				